

Data sheet

Article Description

Line Intermediate Dimmer Type 8114

230 V ~ (+/- 10 %), 50 Hz, from **20 - 200 W/VA**

- **with protective conductor connection**
- **fuse holder accessible from the outside for easy replacement of fuse**


Suitable for:	LV-halogen lamps (with magnetic transformers) HV-halogen lampe, incandescent lamps
Rated voltage:	230 V ~ (+/- 10 %), 50 Hz,
Rated power:	20-200 W/VA
Operating principle:	leading edge
Dimensions:	LWH 96 x 41 x 28 mm
Function:	On/Off/dim via control dial
Cut-off:	electronic E
Max. cord diameter:	8 mm
Temperature protection:	thermal switch (reversible)
Overload-/short-circuit-protection:	fuse T1A, 250 V
Cycle of operation:	> 25.000
Protection class:	2
Safety class:	IP20
Connection:	screw terminals 0,5-1,5 mm ² (flexible)

Article Description



Made in Germany

Connection diagram

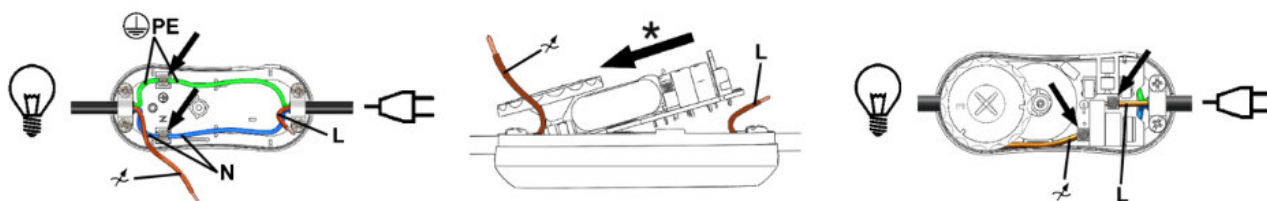

inter BÄR-No.	Colour
8114-004...	black
8114-008...	white
8114-000...	transparent
8114-010...	gold

Technical modifications reserved!
Works at 230 V-mains must only be carried out by a specialist!