

Data sheet

Article Description

NRGkick Fix Select, for fixed connection with lockable wall socket 230 V/16 A, Type 9332

- Socket overheating protection
- Plug protection with arc protection
- Protective conductor test by means of loop impedance
- Thermo-Protect temperature management
- False installation test
- Temperature monitoring at each plug attachment and phase pin
- Domestic plug overheating protection on both pins
- Phase shift detection
- Blackout protection (Protection from power cuts)
- Energy meter
- Theft-proof
- Over- and undervoltage protection
- Drive-over proof
- Access to all information with NRGkick App

Article Picture



Technical Data:

Nominal voltage: 230 V/400 V/50 Hz

Nominal current: 32 A

Max. charging power: 22 kW

RCD (AC): 30 mA

RCD (DC): 6 mA

IP protection class: IP67

Shock+impact resistant: IK10

Operating conditions: - 40 ° C - + 70 ° C,
(Norm: + 45 ° C)



Humidity: 5 %- 95 %

Sea level: max. 4.000 m

Weight(5 m cable): approx. 3.9 kg

Dimensions (Unit): LWH 216 x 90 x 64 mm

Connection technologies: WLAN 2,4 Ghz,
Bluetooth Low Energy (BLE)

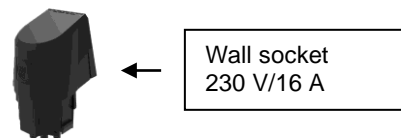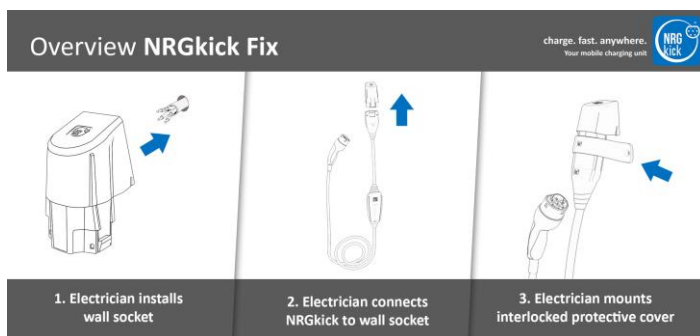

In a practical set consisting of:

NRGkick without plug attachment, wall socket 16 A, interlocked protective cover

inter BÄR-No.	Cable length
9332-001.01	with 5 m cable
9332-002.01	with 7.5 m cable

Technical modifications reserved!
Works at 230 V-mains must only be carried out by a specialist!